


ALL PANELS ARE CONSTRUCTED OF 18GA (0.0478") GALVANIZED STEEL. ALL ANGLES ARE CONSTRUCTED OF 14GA (0.0747") GALVANIZED STEEL. WHEN REQUIRED, SUPPORT STRUCTURES (C-CHANNELS, I-BEAMS, & T'S) ARE CONSTRUCTED OF 12GA (0.1046") GALVANIZED STEEL UNLESS STATED OTHERWISE.


AFC SPRAY BOOTHS ARE CONSTRUCTED TO THE STANDARDS OF THE NATIONAL FIRE PROTECTION AGENCY (NFPA-33), OCCUPATIONAL HEALTH AND SAFETY ADMINISTRATION (OHSA), AND ENVIRONMENTAL PROTECTION AGENCY (EPA).

FINAL ASSEMBLY AND INSTALLATION, WIRING, AND FIRE SUPPRESSION ARE DONE BY OTHERS (NOT AFC) AND MUST BE DONE IN ACCORDANCE WITH NATIONAL SAFETY CODES UNLESS SAY OTHERWISE BY LOCAL AUTHORITY HAVING JURISDICTION.

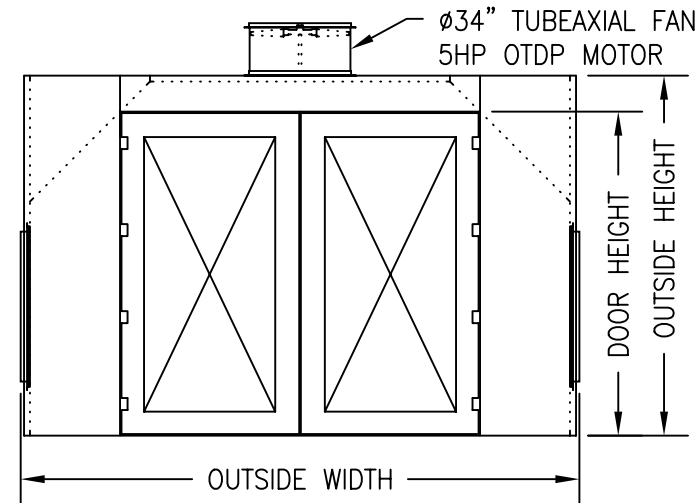

## STANDARD BOOTH INFORMATION:

OUTSIDE DIMENSION	16'4"w x 2x'2"d x 10'0"h
INSIDE DIMENSION	15'0"w x 2x'0"d x 9'0"h
ACCESS DOORS	30"w x 78"h
DRIVE-IN DOORS	10'0"w x 9'0"h
AIR MAKE-UP	Optional AMS1000

	<b>AIR FILTRATION CO., INC</b> 250 AIRPORT PARKWAY, OROVILLE, CA 95965 (800) 331-7744 (530) 533-0179 (FAX)		This drawing is the property of AFC, inc. and is not to be used unless in direct connection with AFC, inc. All right reserved.
	Drawn by: JYT	Dwg No: CROSSFLOW_SPRAY_BOOTH	Rev:
Date: 5/1/01	Scale: NTS	Sheet:	